

HBrinker Mechanical Seal

Compressor seal

Mechanical Seal HB800



H-Brinker

www.HBrinker.com

IRANSEAL
Mechanical Seal



Mechanical Seal HB800

Operating range

Shaft diameter: $d = \dots 220 \text{ mm}$ (8.66")

Pressure: $(p_2 - p_1) = \dots 5 \text{ bar}$ (73 PSI)

Sliding velocity: $v_g = 90 \text{ m/s}$ (295 ft/s)

Materials

- Bellows: AM350, Inconel® 718, Hastelloy®-C
- Seal face: Special SiC, high-density carbon graphite
- Seat: Silicon carbide
- Secondary seals: FKM (bearing side)
- Metal parts: 1.4301, Carpenter® 42, Inconel® 718, Hastelloy®-C

Features

- Oil-lubricated Recommended applications
- Double seal
- Balanced
- Bi-directional
- Stationary bellows (process side)
- Multiple springs (bearing side)
- Shrink-fit seat
- Double-pressure balanced

Advantages

- Suitable for high sliding velocities
- Seal does not open if oil pressure drops
- Rugged seat with bandage ensures reliable operation
- Compact design with few sealing components

Recommended applications

- Oil and gas industry
- Refining technology
- Petrochemical industry

HBrinker Mechanical Seal


Compressor seal

Mechanical Seal HB800



H-Brinker

www.HBrinker.com

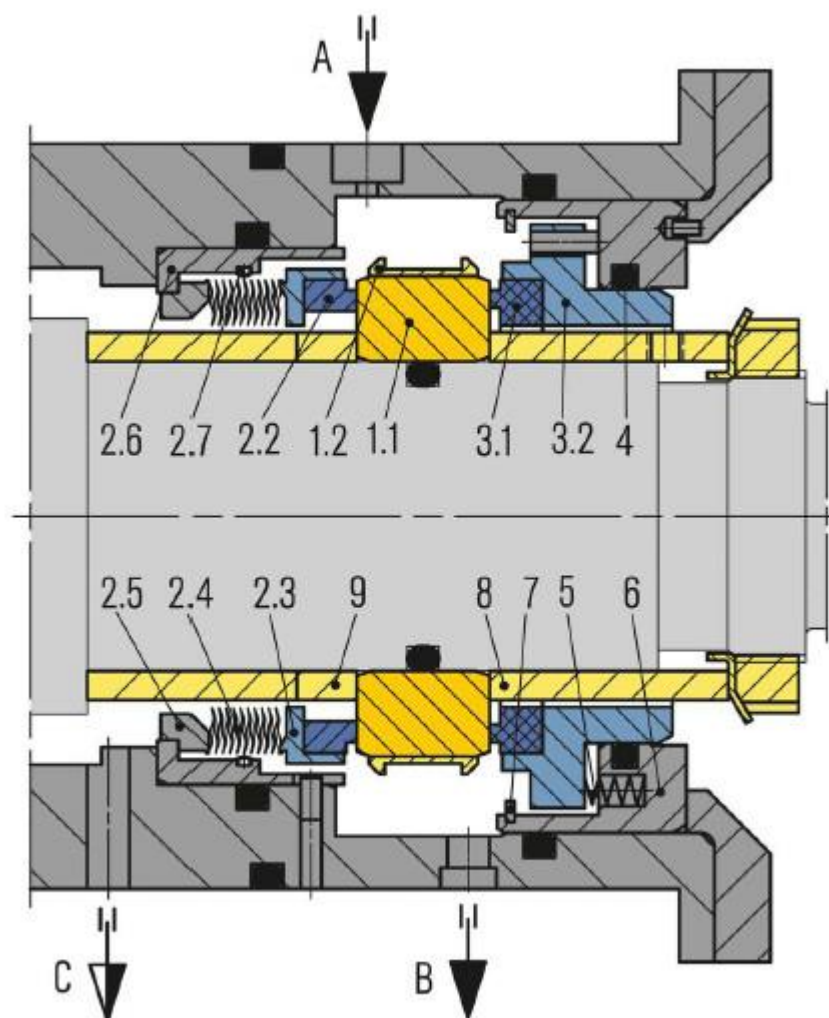

Item	Description
1.1	Seat
1.2,2.2,3.1,3.2	Retainer
2.2,3.1	Seal face
2.4	Bellows
2.5	Adapter
4	O-ring
5	Spring
2.6,6	Housing
2.7	Damper
7	Retaining ring
8	Sleeve
9	Spacer
A	Oil IN
B	Oil OUT
C	Drain